

## Type HSTD

250 °C

### Narrow version heating tape


On this narrow heating tape, the PTFE insulated heating cable with earthed protective conductor is laid twice and sheathed with a common metal braiding.

<b>Operating temperature:</b>	max. 250°C
<b>Rated voltage:</b>	230 V AC/ DC (special voltage are possible)
<b>Rated power:</b>	app. 50 W/m
<b>Min. bending radius:</b>	10 mm
<b>Outer dimensions:</b>	app. 4 x 9 mm (thickness x width)
<b>Outer jacket:</b>	metallic braid
<b>Connecting cable:</b>	1 m
<b>Safety conductor braiding:</b>	Cooper nickel plated, moisture proof
<b>Protection grade:</b>	IP 65 (EN 60529)
<b>Protection class:</b>	I

Temperature control using our integral thermostat HTI, as listed in chapter 6 Temperature Controllers.  
In HTI version controllable without additional sensor.

Metres	Watt	Order Nr.
0,5	30	HSTD/005
1,0	50	HSTD/010
1,5	90	HSTD/015
2,5	150	HSTD/025
4,0	220	HSTD/040
6,0	275	HSTD/060
8,0	400	HSTD/080
10,0	500	HSTD/100
15,0	700	HSTD/150
20,0	1100	HSTD/200

In addition to the listed lengths, larger and intermediate lengths are also available.

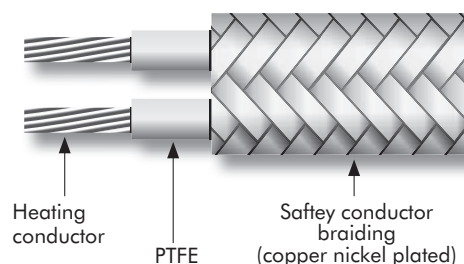

Flexible Auxiliary Heaters